

POS



PS6508-MIT

Pentium® M / Celeron® M Multimedia Interactive Terminal

Features and Benefits:

- Pentium® M / Celeron® M Multimedia Interactive Terminal
- 15" LCD display with ELO 5-wire resistive or ELO surface capacitive touch screen
- Built-in Omni-direction Laser Scanner
- Optional Type I/II CF Card Module
- Optional MSR
- VESA 100 Wall Mount Standard
- Ultra Slim Shape



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw


<http://www.protech.com.tw>




ISO CERTIFIED
9001 14001

PS6508-MIT Pentium® M / Celeron® M Multimedia Interactive Terminal


Front View

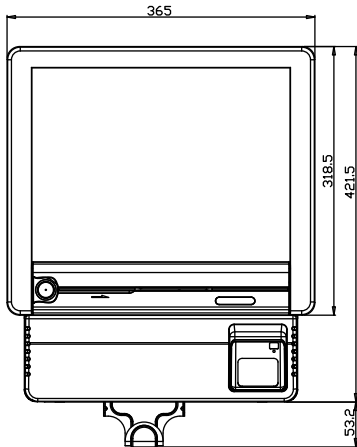

Side View



I/O View

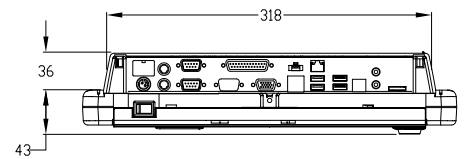

Unit: mm

Specification

System	
CPU Support	Intel® Celeron® M 1.5GHz CPU (up to Pentium® M 1.8GHz)
Memory	1 x DDR2 SO-DIMM Slot, 512MB DDR2 SO-DIMM (up to 1GB)
Core Logic	Intel® 910GML E & ICH6M
Network	10/100Base-T Fast Ethernet
Audio	AC' 97 Codec with internal mono speaker (2 watt x 1)
Power Supply	120W Power adapter
System Weight	7.4 kg
Dimension (WxHxD)	365 x 421.5 x 70mm (14.37" x 16.59" x 27.56")
Mounting type	Support VESA 100 standard
O.S. Compliant	Windows XP / XPE, Linux, WEPOS

Storage

HDD	1 x 2.5" SATA HDD (standard 40GB)
CF	1 x Optional bootable Compact Flash slot for CF type I/O storage

I/O Ports

USB	4 x USB 2.0 ports
Serial Ports	2 x DB-9 (COM 1/2), +5/12V Selectable (1 x DB-9 for built-in Omni-direction Laser Scanner)
Parallel Port	1 x Parallel port (SPP/EPP/ECP)
PS/2	2 x PS/2 ports

LAN	1 x 10/100 Mbps
VGA	1 x DB-15 VGA Interface
Audio	1 x Line-out, 1 x Mic-in Audio Jack

Display

LCD	15" TFT LCD
Max. Resolution	1024 x 768
Viewing Angle	0 ~ 65 degree
Brightness	250 cd/m ²
Touch Screen	5 - wire analog resistive / Surface capacitive

Environment

EMC & Safety	CE, FCC, cUL
Operating Temp.	0° ~ 35°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering Information

PS6508-MIT	15" multimedia interactive terminal with Celeron-M 1.5GHz, 512MB DDR2 SO-DIMM, 40GB HDD
MSR	JIS-II, ISO Track 1+2+3
Color	True White
OS	Windows XP / XPE, Linux, WEPOS

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Dec. 2007